


Technical data:

▪ Function principle	Electrically operated lubrication pump	
▪ Lubricant	Greases: NLGI 1 to NLGI 2	
▪ Cartridge volume	400 ml	
▪ Working pressure	3600 psi 248 bar	
▪ Back pressure	800-1000 psi	55-69 bar
▪ Operating temperature	-40 to +65°C	
▪ Number of pump elements	1	
▪ Lubricant output	6 cm ³ /min	
▪ IP-protection class	IP 6K9K	
▪ Voltage	12V DC	
▪ Operating current	10 or 20 A	
▪ Outlet connection	G1/4	
▪ Mounting position	any	
▪ Dimensions (max. HxDxW)	406x190x89 mm	
▪ Weight (empty)	2.08 kg	





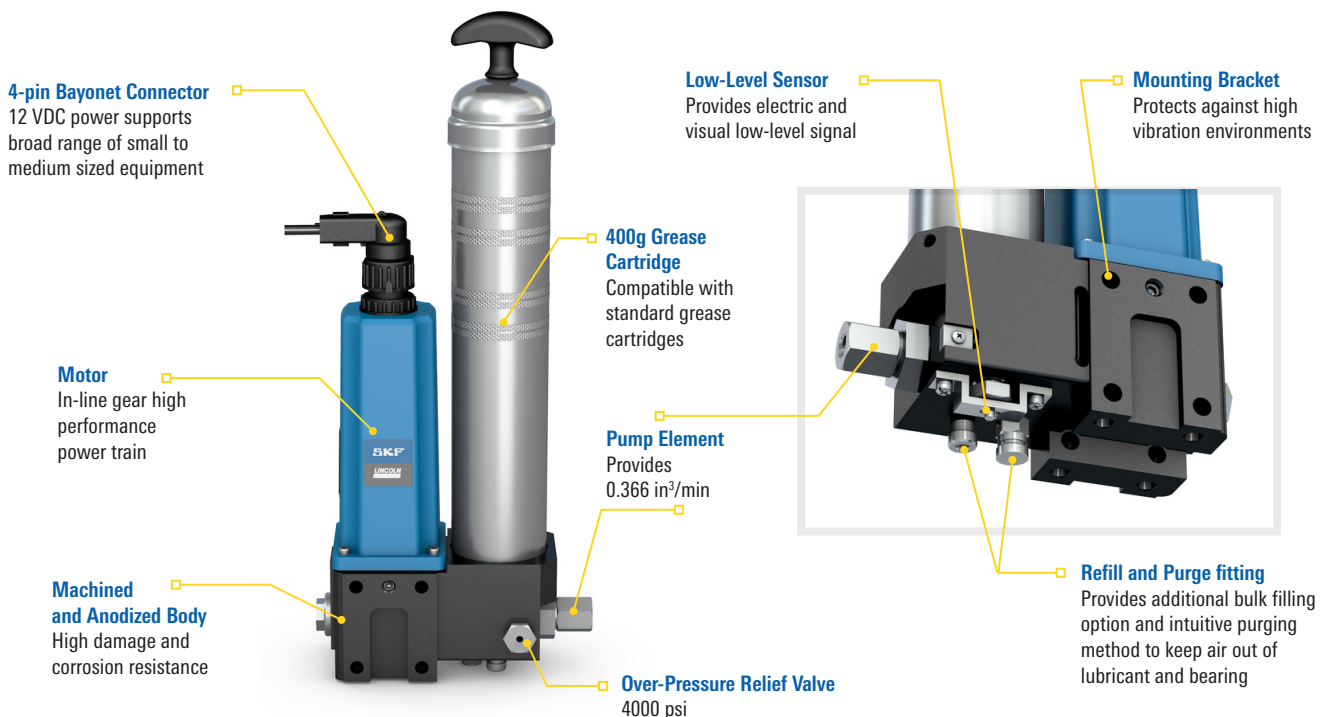

Application:

- Construction machinery (mini excavators, skid steer loaders)
- Farm machinery (small tractors, telehandlers)
- Municipal equipment (tractors)



DATA SHEET

(AECP) AUTOMATIC ELECTRIC CARTRIDGE PUMP

PART NO	DESCRIPTION	PRODUCT
05-90010-00	AECP pump, 12V DC	
01-280521	Mounting bracket	
03-000068-2	Low level light	
03-001107	Low level decal	LOW LEVEL GREASE
01-280518	Cylinder Retainer Kit - Optional	
05-IG502-2-E912	External Controller - Optional	
02-664-85388-8	In-cab push button - Optional	
01-280520	Boot cap - Optional	